


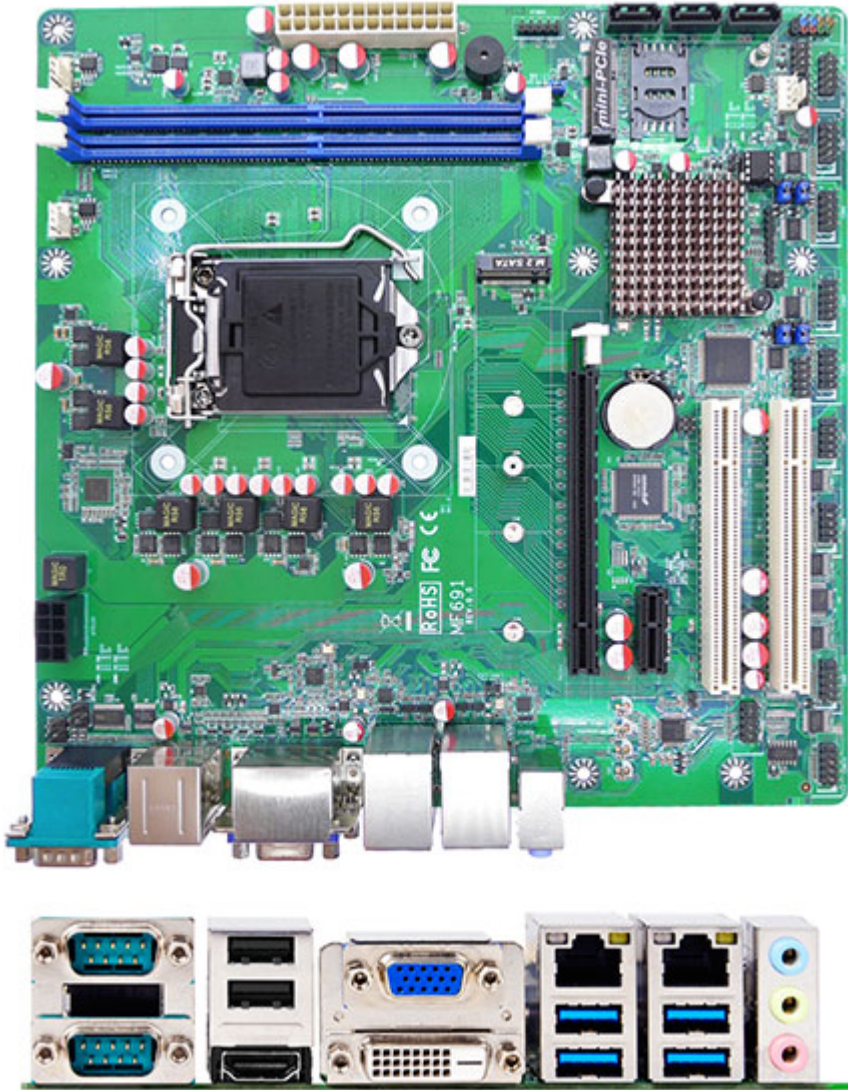

279.00 EUR  
incl. 19% VAT, plus [shipping](#)

- Intel® LGA1151 Socket Core i3, i5, i7 & Pentium Processors (max. 65W)
- Intel® H110 Express Chipset
- Support Dual Channel DDR4 2133MHz, 2 \* DIMM slot, up to 32GB memory
- 2 \* Realtek Gigabit LAN (RTL8111G)
- 3 \* SATA III (6Gb/s), 1 \* M.2 (M key 2242, 2260, 2280, 22110)
- 4 \* USB 3.0, 5 \* USB 2.0/1.1
- 10 \* COM ports (COM1 supports RS232/422/485)
- Support TPM 1.2 function (option)
- Micro ATX form factor (244mm x 244mm)

| Form Factor      |                                                                |
|------------------|----------------------------------------------------------------|
| Dimensions       | - Micro ATX (244 * 244mm)                                      |
| Processor System |                                                                |
| CPU              | - Intel LGA 1151 Socket Core i7 / i5 / i3 & Pentium Processors |
| Core Number      | - (By CPU)                                                     |
| Max Speed        | - (By CPU)                                                     |
| L2 Cache         | - (By CPU)                                                     |
| Chipset          | - Intel H110 Chipset                                           |
| BIOS             | - AMI 64Mb Flash ROM                                           |

| Expansion Slot  |                                                        |
|-----------------|--------------------------------------------------------|
| Mini-PCIe       | - 1 (full size)                                        |
| m.2             | - 1 (M Key 2242, 2260, 2280, 22110)                    |
| PCIe            | - 1 * PCIe x16 & 1 * PCIe x 1                          |
| PCI             | - 2                                                    |
| SIM card holder | - 1                                                    |
| Memory          |                                                        |
| Technology      | - Dual Channel DDR4 2133MHz                            |
| Max.            | - 32GB                                                 |
| Socket          | - 2 * DIMM                                             |
| Graphics        |                                                        |
| Controller      | - Intel® Gen9 Graphics supports DX 11/12, OGL4.3 / 4.4 |
| VRAM            | - Shared Memory                                        |
| VGA             | - 1 (Max. Resolution : 1920*1200@60Hz)                 |
| DVI-D           | - 1 (Max. Resolution : 1920*1200@60Hz)                 |
| HDMI            | - 1 (Max. Resolution : 3840*2160@24Hz)                 |
| DP              | - 0                                                    |
| eDP             | - 0                                                    |
| MultiDisplay    | - Dual Display                                         |
| Ethernet        |                                                        |
| Ethernet        | - 10/100/1000 Mbps                                     |
| Controller      | - PCIe GbE LAN : Realtek RTL8111G                      |
| Connector       | - 2 * RJ 45                                            |
| Audio           |                                                        |
| CODEC           | - HD Audio : Realtek ALC662                            |
| Channel         | - 6 Channel                                            |