


279.00 EUR
incl. 19% VAT, plus [shipping](#)

- Quad-Channel !

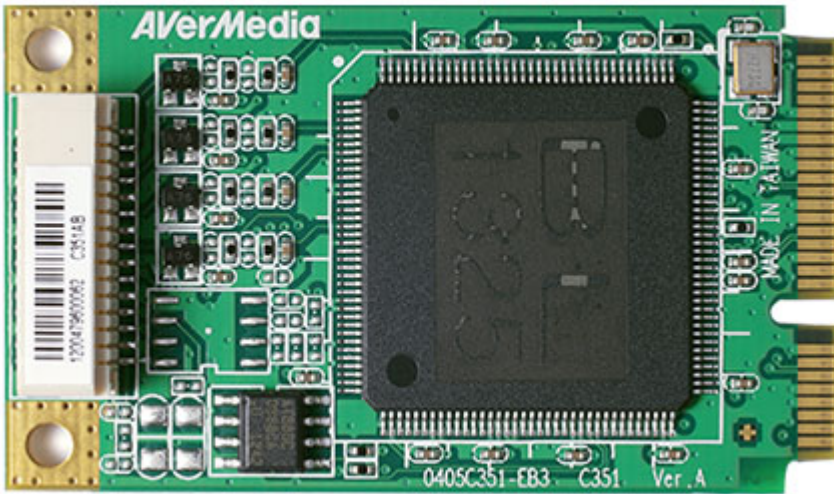

Support:  [Datasheet](#)

The DarkCrystal SD Capture Mini-PCIe Quad is capable of preserving up to four channels simultaneously from multiple input sources. The exclusive hardware design of the DarkCrystal SD Capture Mini-PCIe Quad guarantees a fast response and solid performance for high-density SD capture or encoding demands. Saving you cost and a valuable slot on your PC.

The exclusive hardware design of the DarkCrystal SD Capture Mini-PCIe Quad guarantees a fast response and solid performance for high-density SD capture and encoding demands. All while saving a valuable slot on your PC.

- Video capture with composite input
- 4-channel concurrent capture solution
- Standard minicard dimension
- Mainstream programming languages supported
- DirectShow compatible

| | |
|------------------------------|--|
| Module Type | PCI Express Minicard |
| Input | 4-ch Composite Audio(L/R) |
| Video Resolution | NTSC (29.97Hz): 720 x 480, 640 x 480, 360 x 240, 320 x 240, 180 x 120, 160 x 120 PAL (25Hz): 720 x 576, 640 x 480, 360 x 288, 180 x 144 |
| Color Adjustment | Brightness, Contrast, Hue (NTSC only), Saturation |
| Operating Environment | Temperature: 0 to +55 ■ Humidity: 0 to 90% RHNC |
| Storage Environment | Temperature: -30 to +65 ■ Humidity: 0 to 90% RHNC |
| Power Requirement | 1.2W |
| Dimensions (L x W) | 50.95 x 30mm |
| | System Requirements |
| CPU | Intel® Pentium®4 3.0 GHz AMD Athlon™ 64 3200+ |
| Memory | 512 MB RAM |
| VGA | VGA card with support for DirectX9.0c or above |
| Sound Card | Yes |

Supported OS

Windows 7/8.1/10 (32/64 bits), Linux (32/64 bits)*